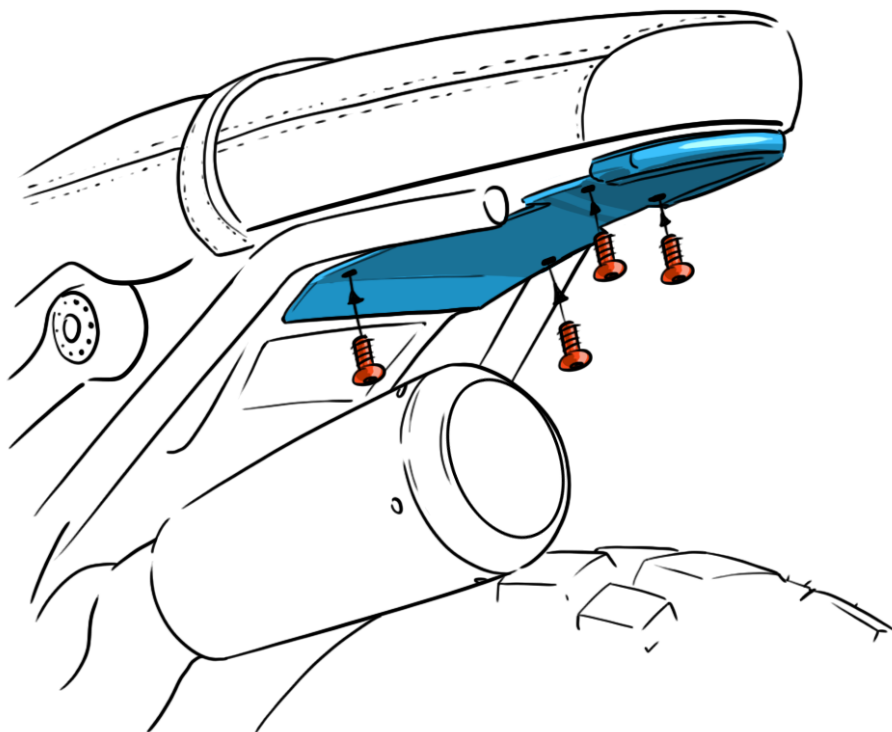


**ATTENZIONE!**Leggere attentamente il foglio '*Informazioni importanti*' prima di procedere.**WARNING!**Carefully read the '*Important informations*' sheet before starting.

EN_ After removing the original license plate holder, fix the Tail Tidy plate with four screws supplied in the kit as shown in the drawing.


Now follow the diagram to connect the wiring to the bike. Hide the harness under the passenger seat.

WARNING: in case the lights are not working properly, update the firmware from version K001-25-07-505 onwards at BMW dealership.

IT_Dopo aver rimosso il portatarga originale, fissare la piastra Tail Tidy con quattro viti fornite nel kit come mostrato nel disegno.

Ora seguire lo schema per connettere il cablaggio alla moto. Nascondere il cablaggio sotto la sella del passeggero.

ATTENZIONE: nel caso in cui le luci non funzionino correttamente, aggiornare il firmware dalla versione K001-25-07-505 in poi, presso una concessionaria BMW.

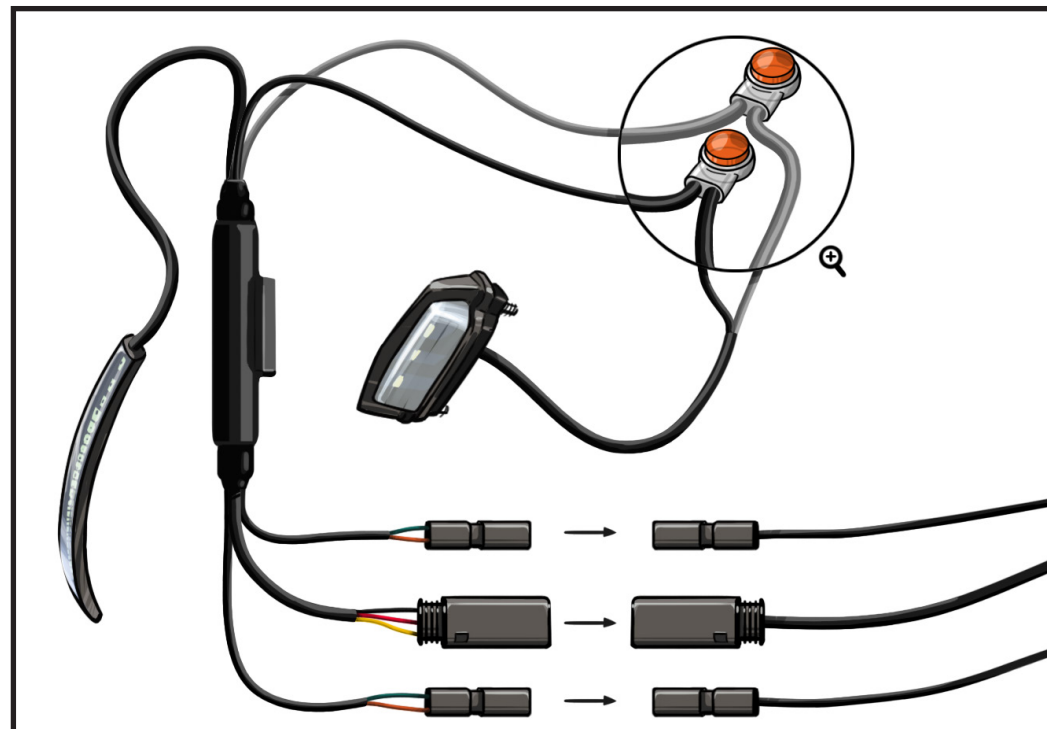

Arrow Plugs

