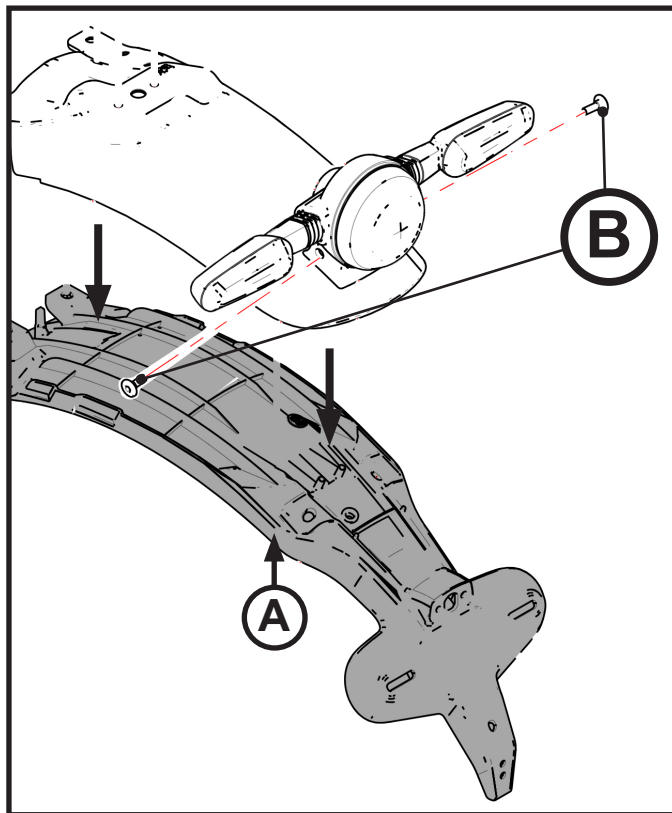
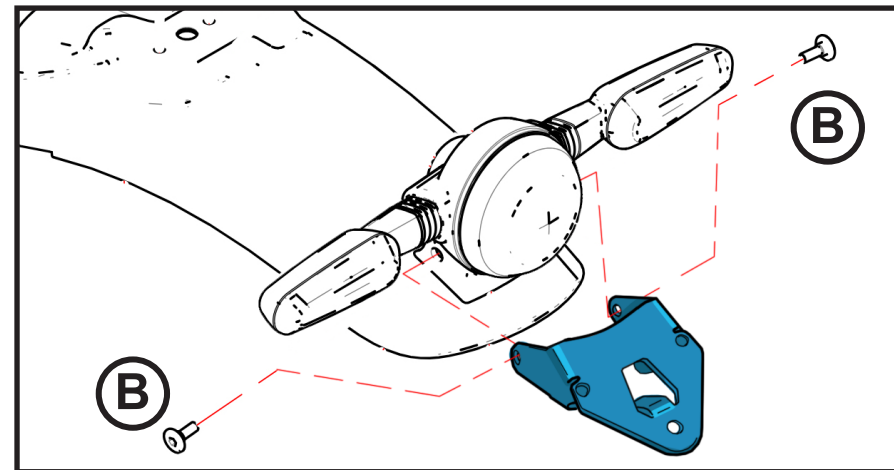


**ATTENZIONE!**Leggere attentamente il foglio *'Informazioni importanti'* prima di procedere.**WARNING!**Carefully read the *'Important informations'* sheet before starting.**EN** Start by removing and discarding the lower rear fender cover.

Also remove the screws B indicated in the diagram in Fig. 1.

Cut the original license plate light wiring approximately 15 cm from the connector to recover the original wiring connector. Then use the supplied wire tap connectors to connect the new LED strip to the original connector.

Finally, secure the license plate bracket to the motorcycle tail light assembly using the original B screws, then fasten the license plate mounting plate to the bracket.

**IT** Partire smontando ed eliminando la cover inferiore del parafrangente posteriore.

Rimuovere anche le viti B indicate nello schema in fig.1

Recuperare il connettore del cablaggio originale della luce targam tagliando il cavo a circa 15 cm dal connettore. Dunque utilizzare i rubacavo forniti nel kit per connettere la nuova strip led al connettore.

Terminare fissando il supporto targa al faro della moto riutilizzando le viti originali B, e fissando il piatto targa alla staffa.